


1655 KG
(WITHOUT WATER AND OIL)

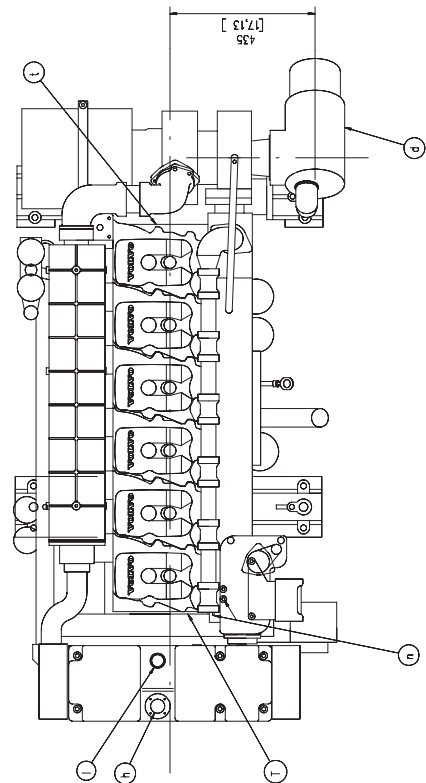

- (A) SEA WATER OUTLET
- (B) SEA WATER DRAIN (4X)
- (C) SPEED CONTROL LEVER
- (D) NET EXHAUST BEND. OPTION CONNECTION FOR HOSE INSIDIA 6" OR 7" (D=152.4 OR 177.8 mm)
- (E) FRESH WATER DRAIN (5X)
- (F) FUEL INLET FOR PIPE D $\varphi=10$ mm
- (G) FUEL RETURN FOR PIPE D $\varphi=10$ mm
- (H) LIQUID-LEVEL FRESH WATER. OPTION
- (J) SEA WATER INLET NIPPLE FOR 2 1/2" I.D. HOSE (BY 63
- (K) OIL FILLER
- (L) FRESH WATER FILLER ENGINE
- (M) ELECTRIC CENTRAL UNIT
- (N) VENTILATING COCK (3X)
- (O) AIR INLET
- (P) OIL DIP STICK ALT. LOCATION
- (R) ZINC ANODE (2X)
- (S) ALTERNATOR
- (T) LIFTING EYE BOLTS (2X)
- (U) OIL DRAIN

mm)